


VOLVO POWER VE D12 365



SPECIFICATIONS

Model	Volvo VE D12 365 for VHD only
Base Engine Configuration	4 cycle / inline 6
Aspiration / intercooler	Turbocharged / air to air
Cam / valve configuration	SOHC / 4 per cylinder
Cylinder head	One Piece
Injection system	Electronic Unit Injectors (EUI)
Electronic management system	VECTRO III
Horsepower	Uprating (395 or 435) software only
Displacement, cu in (L)	740 (12.13)
Compression ratio	17.3:1
Bore & stroke, in (mm)	5.16 x 5.90 (131 X 150)
Dry weight, lb (kg)	2477 (1126)
Engine Ratings, hp	365
Peak power hp / Peak torque lb ft	365 @ 1800 / 1350 @ 1200
Governed rpm (high idle)	2100 (2300)
Recommended cruise range, rpm	1450 - 1650
Start engagement torque lb ft	627 @ 800
Oil Service Intervals, etc.⁽¹⁾	
Total oil change capacity, in qts (L)	39 (37)
Number of oil filters	2 full flow, 1 by-pass
Oil change:	
Severe duty, VDS-2 or EO-N Prem Plus oil	12,000 miles / 19,000 km / 300 h
Standard duty, VDS-2 or EO-N Prem Plus oil	15,000 miles / 24,000 km / 400 h
Extended oil drain, VDS-2 or EO-N Prem Plus oil only	25,000 miles / 40,000 km / 600 h
Engine Equipment	
Compressor (CFM)	18.7
Exhaust pressure governor (EPG)	Standard
EPG, Exhaust brake rating	225 hp @ 2300
Preheater	Available
Engine compression brake	Available
VEB, Compression brake rating	350 hp @ 2300
Engine brake weight, lb (kg)	25 (12)
Side engine PTO	Available, 60 hp / 370 lb ft
Front engine PTO	Available, 180 hp / 500 lb ft
Base Warranty⁽²⁾	
Major components	24 months / 250,000 miles / 6,250 hours
Emission components	60 months / 500,000 miles / 12,500 hours
	60 months / 250,000 miles / 6,250 hours
	100% parts & labor
Extended Warranty⁽²⁾	
	60 months / 500,000 miles / 12,500 hours
	Various parts & labor plans available

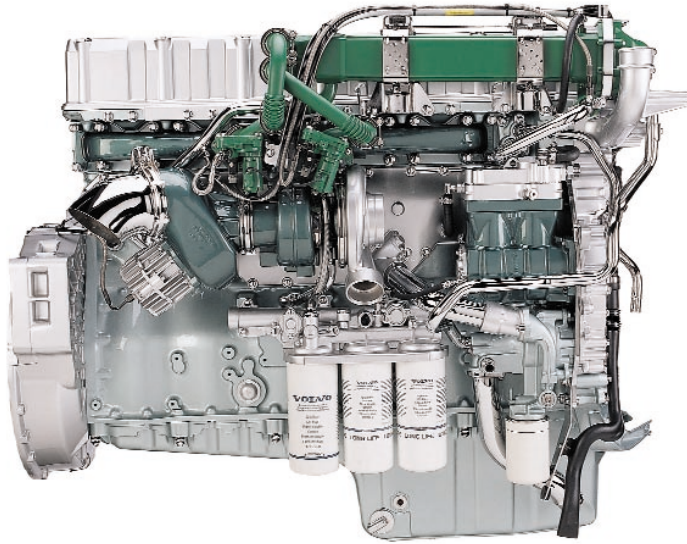

VOLVO


New Roads

(1) For complete information see TSI 175.001.


(2) Conditions and limitations apply. See dealer for details.

VOLVO POWER VE D12 365


VE 365

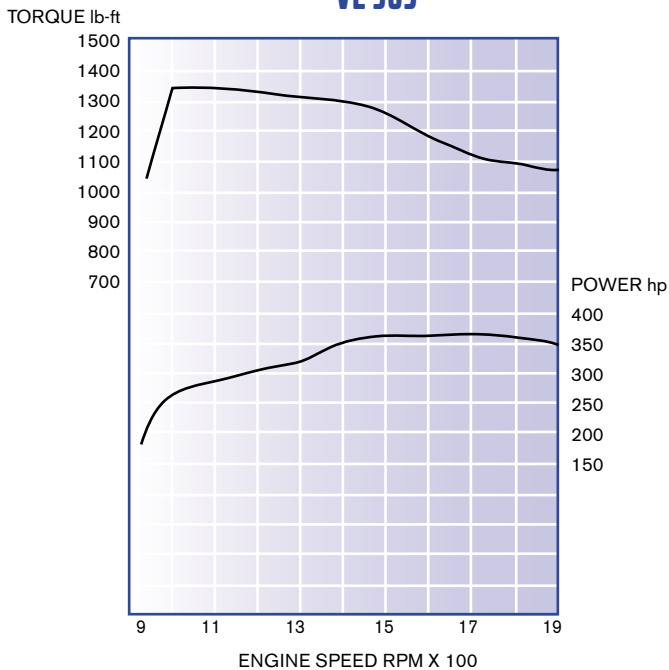

RETARDING POWER

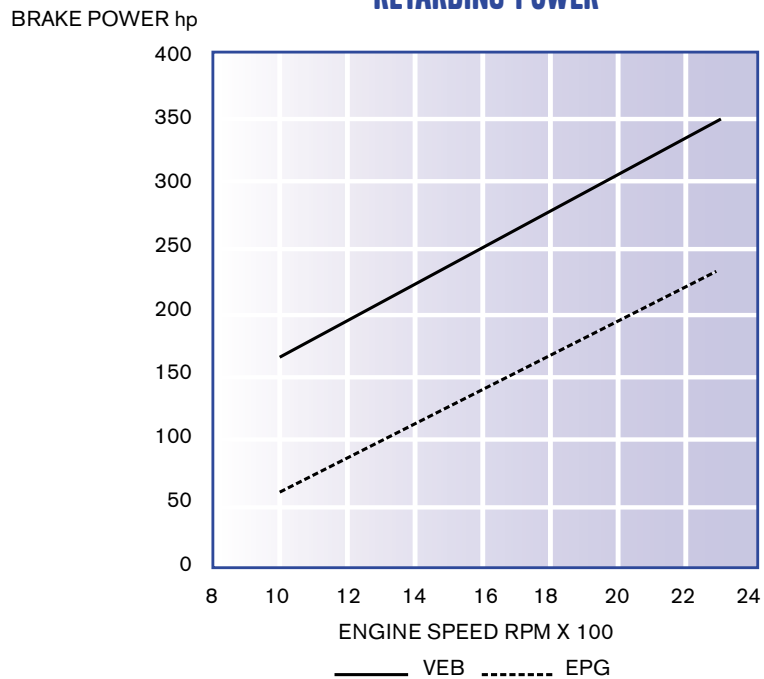

VOLVO DRIVETRAIN RECOMMENDATIONS

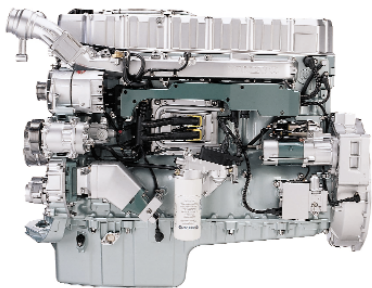

GVW / GCW in lb x 1000	65 - 80
Truck configuration	6 X 4
Engine type	VE 365 for VHD only
Recommended cruise range, rpm	1550 - 1650
Governed rpm @	2100
Manual transmissions⁽¹⁾	Direct / 0.73 overdrive
Tire sizes (revs / mile)	501 - 516
Rear axle ratios	3.90 - 4.50
Recommended cruise speed (mph)	60 - 65
Top speed range (mph)	63 - 68
Minimum startability	+20%
Automatic transmissions, 5-speed⁽¹⁾	HD 4060 or HD 4560
Tire sizes (revs / mile)	501 - 516
Rear axle ratios	3.90 - 5.20
Recommended cruise speed (mph)	60 - 65
Top speed range (mph)	63 - 68
Minimum startability	+20%

(1) A gradeability below 1% at "cruise speed" will result in poor driveability.

VOLVO

Volvo Trucks North America, Inc.
P.O. Box 26115, Greensboro, NC 27402-6115
Volvo Trucks Canada, Inc.
5600A Cancross Court, Mississauga, Ontario L5R 3E9
www.volvotrucks.us.com