


VOLVO POWER VE D12 365

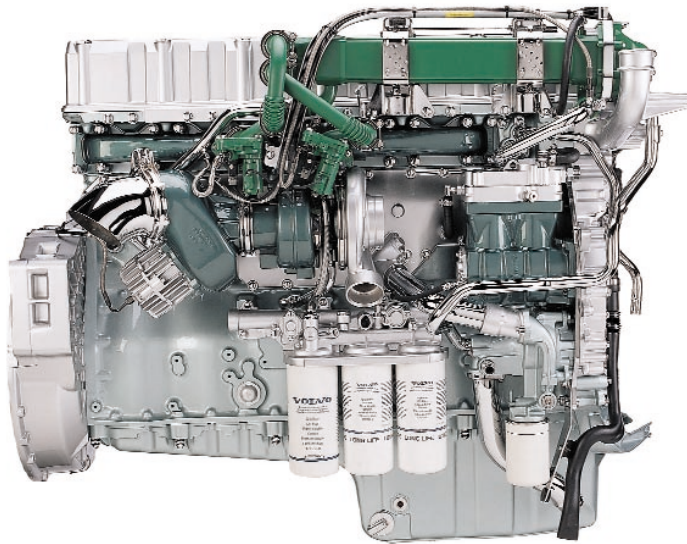

SPECIFICATIONS

Model	Volvo VE D12 365
Base Engine Configuration Aspiration / intercooler Cam / valve configuration Cylinder head Injection system Electronic management system Horsepower Displacement, cu in (L) Compression ratio Bore & stroke, in (mm) Dry weight, lb (kg)	4 cycle / inline 6 Turbocharged / air to air SOHC / 4 per cylinder One Piece Electronic Unit Injectors (EUI) VECTRO III Uprating (395 or 435) software only 740 (12.13) 17.3:1 5.16 x 5.90 (131 X 150) 2477 (1126)
Engine Ratings, hp Peak power hp / Peak torque lb ft Governed rpm (high idle) Recommended cruise range, rpm Start engagement torque lb ft	365 365 @ 1800 / 1350 @1200 1900 (2100) 1450 - 1600 627 @ 800
Oil Service Intervals, etc.⁽¹⁾ Total oil change capacity, in qts (L) Number of oil filters Oil change: Severe duty, VDS-2 or EO-N Prem Plus oil Standard duty, VDS-2 or EO-N Prem Plus oil Extended oil drain, VDS-2 or EO-N Prem Plus oil only	34 (33) 2 full flow, 1 by-pass 12,000 miles / 19,000 km / 300 h 15,000 miles / 24,000 km / 400 h 25,000 miles / 40,000 km / 600 h
Engine Equipment Compressor (CFM) Exhaust pressure governor (EPG) EPG, Exhaust brake rating Preheater Engine compression brake Compression brake rating (VEB) Engine brake weight, lb (kg) Side engine PTO	18.7 Standard 225 hp @ 2300 Available Available 350 hp @ 2300 25 (12) Available, 60 hp / 370 lb ft
Base Warranty⁽²⁾ Major components Emission components	24 months / 250,000 miles / 6,250 hours 60 months / 500,000 miles / 12,500 hours 60 months/ 250,000 miles / 6,250 hours 100% parts & labor
Extended Warranty⁽²⁾	60 months / 500,000 miles / 12,500 hours Various parts & labor plans available

(1) For complete information see TSI 175.001.


(2) Conditions and limitations apply. See dealer for details.

VOLVO


New Roads

VOLVO POWER VE D12 365


VE 365

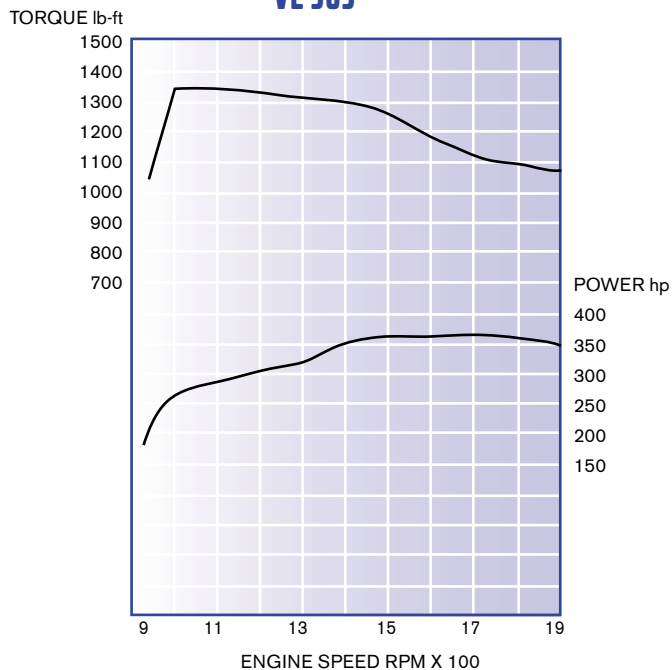

RETARDING POWER

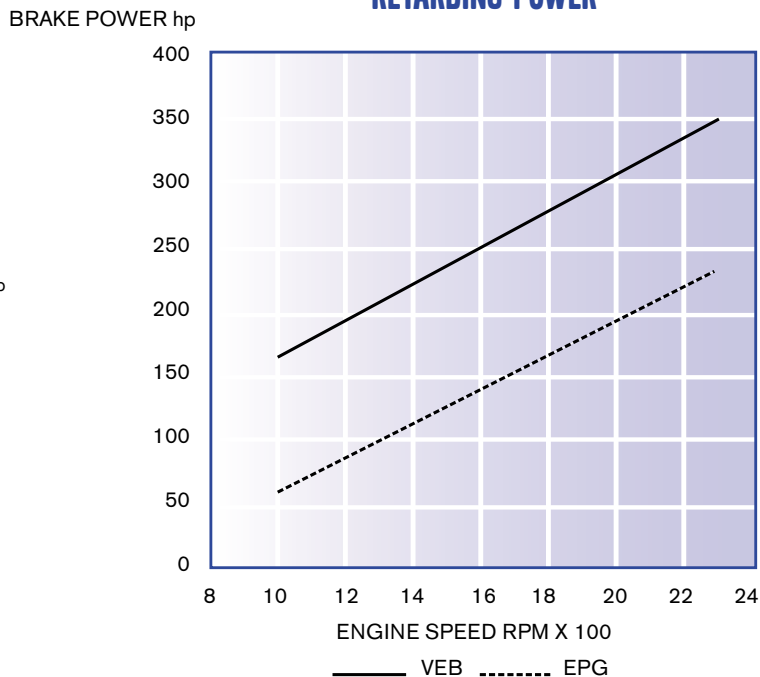

VOLVO DRIVETRAIN RECOMMENDATIONS

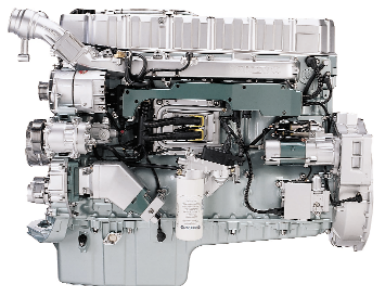

GVW / GCW in lb x 1000	65 - 80
Truck configuration	6 X 4
Engine Type	VE D12 365
Recommended cruise range, rpm	1450 -1600
Governed rpm @	1900
Manual Transmissions⁽¹⁾	Direct / 0.73 overdrive
Tire Sizes (revs / mile)	501 - 516
Rear axle ratios	2.64 - 3.10 / 3.90 - 4.30
Recommended cruise speed (mph)	62 - 67
Top speed range (mph)	65- 75
Minimum startability	16%

(1) A gradeability below 1% at "cruise speed" will result in poor driveability.

VOLVO

Volvo Trucks North America, Inc.
P.O. Box 26115, Greensboro, NC 27402-6115
Volvo Trucks Canada, Inc.
5600A Cancross Court, Mississauga, Ontario L5R 3E9
www.volvotrucks.us.com